


U-NUT

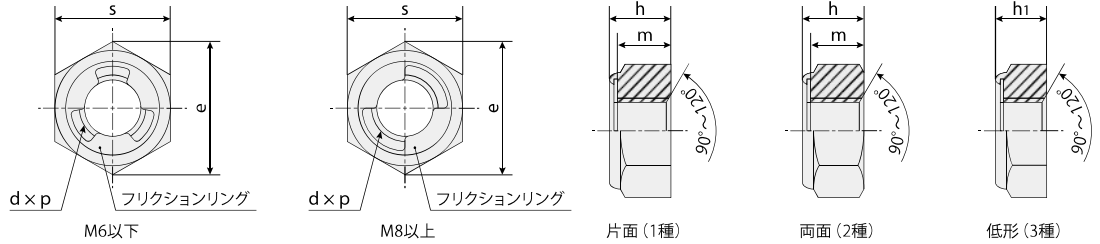

●: 生産品

ねじ精度: JIS6H (2級) 単位: mm

ナット本体材質		フリクションリング材質		SS400		S45C (調質)		SUS301		SUS304		単重 (g) 約 (低形は除く)				
呼び径 (d)	ピッチ (p)	二面幅 (s)		全高 (h)		ねじ高さ (m) 約	対角 (e) 約	片面 (1種)	両面 (2種)	低形 (3種) (h1)	両面 (2種)		低形 (3種) (h1)	片面 (1種)	低形 (3種) (h1)	
		基準寸法	許容差	基準寸法	許容差											
M 3	0.5	5.5	0 -0.2	3.2	±0.3	2.7	6.4		●				●		0.4	
M 4	0.7	7		3.8		3.0	8.1		●	3.1				●	3.1	0.8
M 5	0.8	8		4.6		3.9	9.2		●	4.0	●			●	3.4	1.2
M 6	1	10		5.1		4.2	11.5		●	4.0	●			●	4.0	2.1
M 8	1.25 1	13	0 -0.25	7.3	±0.4	6.1	15.0		●	5.0	●		●	5.0	5.1	
M10	1.5 1.25	17		8.3		7.1	19.6		●	6.5	●			●		6.5
M12	1.75 1.5	19	0 -0.35	10.5	±0.5	9.0	21.9		●	8.5	●		●	8.5	15.2	
	1.25							●	8.5	●	8.5	●				
M14	2 1.5	22	0 -0.35	12.5	±0.5	11.0	25.4	●		9.5	●		●	9.5	24.0	
M16	2 1.5	24		14.5		13.0	27.7	●		12.0	●	12.0	●	●		11.0
	M18			2.5 1.5		27	16.0	14.0	31.2	●		12.0	●	12.0	●	12.0
M20	2.5 1.5	30		17.5		15.4	34.6	●		14.0	●	12.0	●	●	13.5	61.4
M22	2.5 1.5	32	0 -0.4	19.5	±0.6	17.2	37.0	●			●		●		74.3	
M24	3 2	36		21.5		18.8	41.6	●		16.0	●		●	16.5		
M27	3	41		24.0	21.2	47.3	●			●		●		159		
M30	3.5 3	46		27.0	24.0	53.1	●		21.0	●		●	21.0	226		
M33	3.5 3	50	0 -0.45	29.5	±0.8	26.5	57.7	●			●		●		287	
M36	4 3	55		32.5		29.5	63.5	●			●		●			
M39	4 3	60		35	31.8	69.3	●			●		●		393		
M42	4.5 3	65		38	34.5	75.0	●			●		●		509		
M45	4.5 3	70	±1.5	40	±1.5	36.0	80.8	●			●		●	651		
M48	5 3	75		42		38.0	86.5	●			●		●			
M52	5 3	80	0 -0.55	46	±2	42.0	92.4	●			●		●	794		
M55	3	85		49		44.5	98.1	●			●		●			
M56	5.5 4			90	52	104.0	45.0	104.0	47.5	●			●		●	1410
M60	5.5 4	48.0					●			●						
M64	6 4	95	54	50.0	110.0	●			●		●		1660			
								●			●		●	1910		

※ 低形は、(h1) 表示品が生産品です。 ※ 在庫状況は都度ご確認ください。 ※ 材質はそれぞれの材質の相当品も含まれます。 ※ 改良のため寸法変更する場合があります。