


# CLIP U-NUT

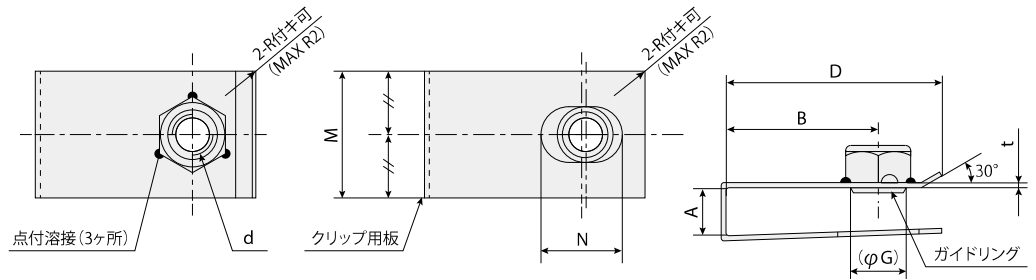

ねじ精度：JIS6H (2級) 単位：mm

ナット本体・クリップ材質 フリクションリング材質					SUS304又は相当品 SUS301			取付部材 標準厚	取付部材 穴位置	ガイドリング 外径 (φG)	参考締付け トルク (N・m) ボルト耐力 300N/mm <sup>2</sup>						
品番	呼び径 (d)	挟み込み 厚さ (A)	穴位置 (B)	全長 (D)	板幅 (M)	穴径 (N)	板厚 (t)										
CU06-020-0105-T1	M 6	2.0	10.5	18.5	25.0	9.0		1.8	9.0	9	6.5						
CU06-035-0110		3.5	11.0	21.5	17.0	11.0		3.2	9.5								
CU08-014-0170	M 8	1.4	17.0	29.5	25.0	16.0	1.0	0.6~1.2	15.0	11	16						
CU08-014-1455			145.5	158.0					143.5								
CU08-035-0220		3.5	22.0	34.5	20.0												
CU08-035-0320			32.0	44.5	30.0												
CU08-065-0170		6.5	17.0	29.5	15.0												
CU08-065-0230			23.0	35.5	21.0												
CU08-065-0320			32.0	44.5	30.0												
CU08-085-0220		8.5	22.0	34.5	20.0												
CU08-095-0170			17.0	29.5	15.0												
CU08-095-0170-T1		9.5	17.0	29.5	13.0	10.0		9.0	15.0								
CU08-095-0300			30.0	42.5	16.0	28.0											
CU08-095-0345			34.5	47.0		32.5											
CU08-095-1200-T1			120.0	138.0	118.0												
CU08-105-0170			10.5	17.0	29.5	15.0											
CU08-105-0220				22.0	34.5	20.0											
CU08-115-0170		11.5	17.0	29.5	25.0	16.0		11.0	15.0								
CU08-115-0220			22.0	34.5					20.0								
CU08-115-0250			25.0	37.5					23.0								
CU08-115-0325	32.5		45.0	30.5													
CU08-125-0295	12.5	29.5	42.0	27.5													
CU08-145-0325		14.5	32.5	45.0	30.5												
CU08-145-0545	54.5		67.0	52.5													
CU10-019-0325	M10	1.9	32.5	45.5	30.0	18.0	1.0	1.7	30.0	13	31						
CU10-023-0380		2.3	38.0	51.0				2.1	35.5								
CU10-033-0275		3.3	27.5	40.5				3.1	25.0								
CU10-035-0220		3.5	22.0	35.0				3.2	19.5								
CU10-050-0280		5.0	28.0	41.0				4.7	25.5								
CU10-085-0230		8.5	23.0	36.0				8.0	20.5								
CU10-095-0225			9.5	22.5				35.5	9.0			20.0					
CU10-095-0315		31.5		44.5				29.0									
CU10-105-0225		10.5	22.5	35.5				20.0									
CU10-105-0450			45.0	58.0				42.5									
CU12-065-0330		M12	6.5	33.0				48.0	35.0			24.0	1.2	6.0	30.0	15	55
CU12-085-0230			8.5	23.0				38.0						8.0	20.0		
CU12-095-0255	9.5		25.5	40.5	22.5												
CU12-095-0300			30.0	45.0	27.0												
CU12-095-0350-T1			35.0	50.0	32.0												
CU12-095-0355			35.5	50.5	32.5												
CU12-095-1200-T1	120.0		138.0	117.0													
CU16-115-0340	M16		11.5	34.0	56.0	50.0	30.0	1.5		11.0	30.0			21	135		

※ 表面処理：OSコート、M8/デブリック処理+OSコート。(OSコートは焼付き防止剤です。)  
 ※ ガイドリング付き。但し“CU06-020-0105-T1”にガイドリングは付いていません。  
 ※ 寸法はすべて内寸です。 ※ 溶融亜鉛めっき品も対応します。 ※ その他サイズも製作致しますのでご相談ください。